

Dealer

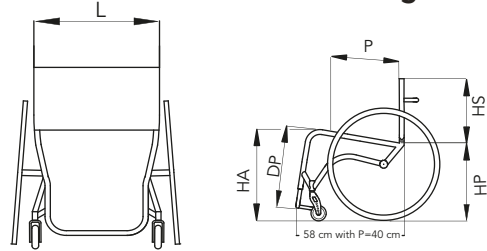
**Key**     standard     option

**QUASAR Fix axle**                       **QUASAR Adj axle**

- L** Seat width                       34  36  38  40  42  44  
**P** Seat depth                       36  38  40  42  44  46  
**HS** Back-rest height               27  29  31  33  35  37  39  41  
**HA** Front seat/floor height       46  48  50  
**HP** Rear seat/floor height        40  42  44  46  48  
**DP** Foot-rest/seat distance       37  39  41  43  45  47  49    cm

# QUASAR

Titanium rigid frame



**Frame colour**                      ①

- Shiny titanium                       Glossy black  
 Pearl white                               Matte black  
 Natural titanium  
 ..... (see "Colours" catalogue) from:  
 Neon green                               Neon orange


**Back-rest: Upholstery**                      ②

- Tension adj nylon  
 Breathable tension adj  
 Without any back-rest uph.  
 **FAMEKH**  
 other seating system.....
- Seat:**  
 Fix (standard, screws)  
 Tension adj. (velcro)  
 Carbon fibre

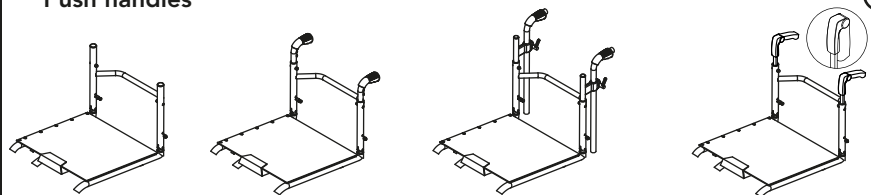
**Backrest upholstery colour**                      ③

- Black  
 Coloured (nylon).....  
colours: orange, red, green, cornflower, light blue  
 Coloured (breathable).....  
colours: red, grey


**Single tubular titanium footplate**                      ④

- 
- Open     Carbon fibre closed     Tilt adjustable Carbon fibre closed


**Push handles**                      ⑤

- 
- Without pushing handles     Fixed pushing handles     Height adjustable pushing handles     Foldable pushing handles


**Distance between the hub centre and back-rest**                      ⑥

- 
- 9 cm (standard)                       7 cm  
 0 cm (biamputated)                       11 cm  
 3 cm     13 cm  
 5 cm

**Backrest tilt**                      ⑦

- 
- 89°  
 91° (standard)  
 93°

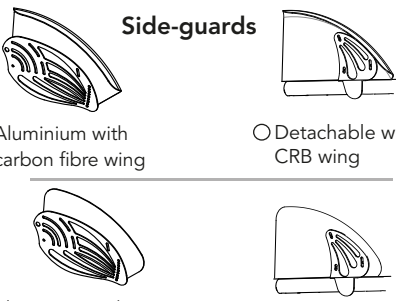
**Front angle**                      ⑧

- 
- 83° (standard) (A = 16 cm)  
 75° (A = 21 cm)


**Rear wheel camber**                      ⑨

- 1°     2°  
 3°     4°
- Quick rel. axles Ø 12mm with cambered bushes length 42 mm (default)  
 Quick rel. axles Ø 1/2" (12,7mm) w/42mm bushes  
 Quick rel. axles Ø 1/2" (12,7mm) w/50mm bushes


**Side-guards**                      ⑩

- 
- Aluminium with carbon fibre wing                       Detachable with CRB wing  
 Aluminium with straight CRB                               Detachable with straight CRB


**Height adjustable from 22 to 28cm "L" arm-rest, detachable and tip-up**                      ⑪

- 
- Elbow-rest**  
 Tubular  
 Straight (26 cm long)  
 Classic (23 cm long)  
 Classic (30 cm long)

**Brakes**                      ⑫

- 
- Scissor brake  
 Composite
- Standard     Pull brake

**Anti-tip device**                      ⑬

- 
- Right  
 Left

Notes

Dealer

**Rear wheels** (14)

- 24" Ultralight (24 spokes)
- 24" Light (24 spokes)
- 24" Star 6x3 (18 spokes, silver or black)
- 24" (36 spokes)
- 24" Mountain-bike with Citybike tyre
- 24" Mountain-bike with Offroad tyre
- 24" Spinergy LX  
spokes colour.....(black def.)
- 25" Spinergy LX  
spokes colour.....(black def.)
- 25" Light (24 spokes) black

**Tyres**

- Pneum. Marathon Plus
- Pneum. high pressure Smooth
- Pneum. high pressure Plugged 24"
- Pn.Schwalbe Right Run 24"
- Solid black KIK 24"  
not available for Ultralight wheels

**Pushrims** (15)

- Aluminium silver
- Aluminium dark
- Chromium-plated steel 24"
- Rubber coated
- Titanium
- OVAAL (silver aluminium)
- OVAALS (dark aluminium)
- OVAALG (w/sil.insert)
- CarboLife CURVE L 24" \*
- CL CurveL TetraGrip rubb.c.24" \*
- CL Quadro rubber ctd 24" \*
- CarboLife GEKKO 24" \*
- Silicon covers 24"  
OVAAL/S/G only in size 24"  
Only OVAAL/GEKKO available for Star6x3  
OVAAL & Carbolife not available for MTB


**Spokes guards** (16)

- Transparent 24"
- Black 24"
- Fantasy  
code pattern .....

(see catalogue of spokeguards)

---

**Lined cushion** in foam polyurethan (18)

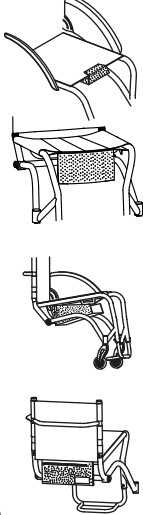


- 3 cm high
- 5 cm high

**Front castors** (17)

- 80 (3") solid
- 80 (3") solid with lights
- 100 (4"x1.1/4) solid with plastic rim
- 100 (4"x1) solid with lights
- 100 (4"x1.1/4) solid with alum. rim
- 125 (5"x1.1/4) solid with plastic rim
- 125 (5"x1.1/4) solid with alum. rim
- 125 (5"x1) solid with lights
- 150 (6") pneumatic
- 150 (6") solid

**Pockets** (19)




- Small under the fix seat or
- Small hanging from the seat
- Big under the seat
- On the back-rest

**Anodized set** (20)  
 (Rear wheel rims & hubs if LIGHT 24", sideguard supports, forks and fittings)

- Black
- Silver
- Light blue
- Red
- Orange
- Cyclamen light purple

(only 24" Light wheels)

**Backrest bar** (21)



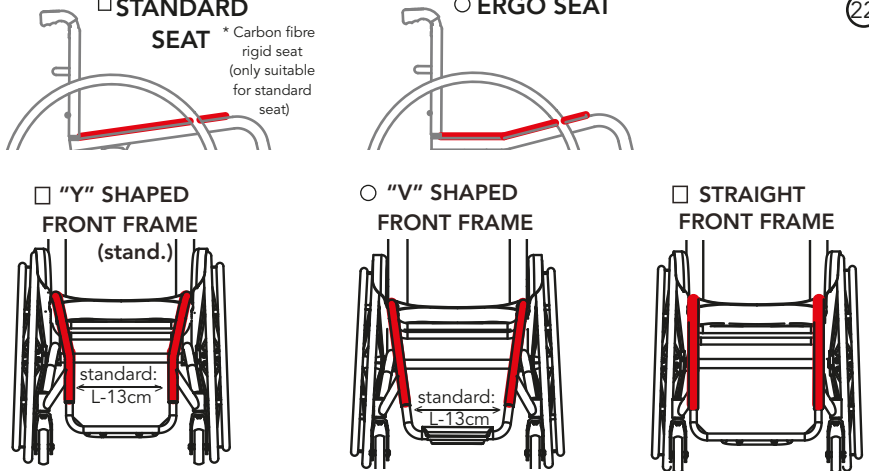
- Standard:  
P(bar) 7,5cm;  
H(bar) 19cm;  
dia 19mm.
- Custom:  
P.....cm;  
H.....cm;

**Options**

- 23  "M+F" velcro strips (hook and loop) on seat
- 24  "M" velcro strips (hook) on seat
- 25  "F" velcro strips (loop) on seat
- 26  Padded rigid seat cushion h 5
- 27  Chest harness
- 28  Chest belt
- 29  Abductor belt
- 30  Catheter holder pocket
- 31  Rx  Lx Crutch holder
- 32  Pump for pneumatics
- 33  Suitcase holder
- 34  45° pelvic belt
- 35  45° padded pelvic belt
- 36  Black backpack
- 38  Front protective covers

**STANDARD SEAT** \* Carbon fibre rigid seat (only suitable for standard seat)

**ERGO SEAT**



"Y" SHAPED FRONT FRAME (stand.)  
standard: L-13cm

"V" SHAPED FRONT FRAME  
standard: L-13cm  
(The tilt adjustable footplate only is suitable with the "V" shaped front frame)

STRAIGHT FRONT FRAME  
(Standard front frame for seat width of 34cm)

Custom front opening .....cm

Reinforced frame (max load 100-120 Kg)

**7,0 kg configuration (FIXED)**  
**7,4 kg configuration (ADJ.)**

- Wheelchair 38x40x31 cm
- Nylon upholstery
- Tit. frame colour: Shiny titanium
- Open foot-rest
- No pushing handles
- Aluminium side guards with carbon fibre wing
- Scissor brakes
- Ultralight wheels
- Pneum. high press. smooth tyres
- Ultralight handrims
- 80 mm front castors
- No pockets

Max load: 100 kg